


## Backing Rings, Accessories

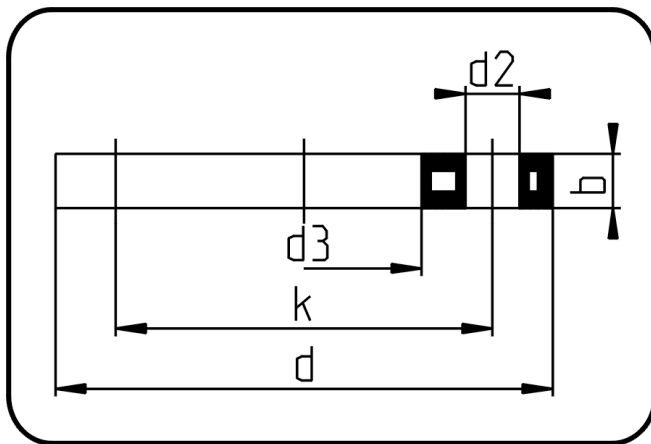

Code: 023

- Backing Ring JIS
- steel insert/for stub flange
- injection moulded
- Flange connection
- PP-FRP grey

The torques nm[NM] specified in the technical catalogue are to be used as maximum values.

| Dimension | Code           | Detail                    | da(OD)<br>mm | d<br>mm | d2<br>mm | d3<br>mm | b<br>mm | k<br>mm | Weight |
|-----------|----------------|---------------------------|--------------|---------|----------|----------|---------|---------|--------|
| 20        | 11.023.0020.11 | 20 - 1/2" - MOP 16 bar    | 20           | 96      | 15       | 28       | 12      | 70      | 0.24   |
| 25        | 11.023.0025.11 | 25 - 3/4" - MOP 16 bar    | 25           | 100     | 15       | 34       | 14      | 75      | 0.29   |
| 32        | 11.023.0032.11 | 32 - 1" - MOP 16 bar      | 32           | 125     | 19       | 42       | 14      | 90      | 0.47   |
| 40        | 11.023.0040.11 | 40 - 1 1/4" - MOP 16 bar  | 40           | 135     | 19       | 51       | 14      | 100     | 0.53   |
| 50        | 11.023.0050.11 | 50 - 1 1/2" - MOP 16 bar  | 50           | 140     | 19       | 62       | 16      | 105     | 0.62   |
| 63        | 11.023.0063.11 | 63 - 2" - MOP 16 bar      | 63           | 159     | 19       | 78       | 16      | 120     | 0.75   |
| 75        | 11.023.0075.11 | 75 - 2 1/2" - MOP 16 bar  | 75           | 175     | 19       | 92       | 16      | 139     | 0.90   |
| 90        | 11.023.0090.11 | 90 - 3" - MOP 16 bar      | 90           | 185     | 19       | 110      | 18      | 150     | 0.85   |
| 110/125   | 11.023.0110.11 | 110/125 - 4" - MOP 16 bar | 110          | 210     | 19       | 133      | 18      | 175     | 1.00   |
| 140       | 11.023.0140.11 | 140 - 5" - MOP 16 bar     | 140          | 250     | 23       | 158      | 20      | 210     | 1.59   |
| 160       | 11.023.0160.11 | 160 - 6" - MOP 16 bar     | 160          | 280     | 22       | 178      | 22      | 240     | 2.50   |
| 200/225   | 11.023.0225.11 | 200/225 - 8" - MOP 16 bar | 225          | 330     | 23       | 238      | 22      | 290     | 2.94   |
| 250       | 11.023.0250.11 | 250 - 10" - MOP 16 bar    | 250          | 400     | 25       | 288      | 26      | 355     | 5.52   |
| 280       | 11.023.0280.11 | 280 - 11" - MOP 16 bar    | 280          | 400     | 25       | 294      | 26      | 355     | 5.40   |
| 315       | 11.023.0315.11 | 315 - 12" - MOP 16 bar    | 315          | 449     | 25       | 337      | 30      | 400     | 7.20   |