


## Sweep Bends

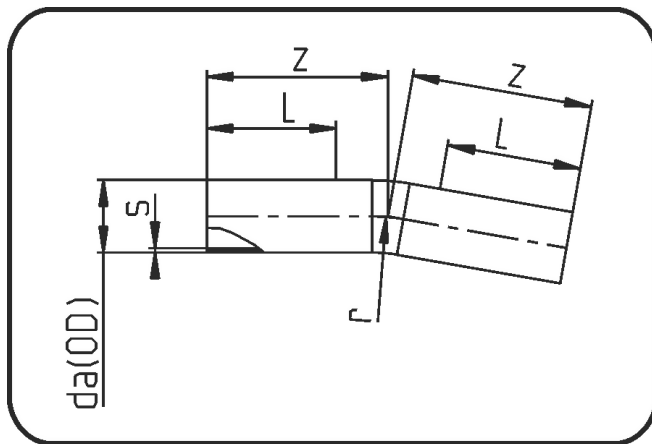

Code: 394

- Sweep Bend 11°
- radius 1.5 x OD
- formed out of pipe
- **Butt + E-fusion-welding**
- **PE 100-RC black**

\*\* On request.

| Dimension | Code           | Detail                  | da(OD)<br>mm | s<br>mm | z<br>mm | r<br>mm | L<br>mm | Weight |
|-----------|----------------|-------------------------|--------------|---------|---------|---------|---------|--------|
| 90        | 70.394.0090.09 | 90 SDR9 ISO S-4 20 bar  | 90           | 10,1    | 210     | 135     | 150     | 1.70   |
| 110       | 70.394.0110.09 | 110 SDR9 ISO S-4 20 bar | 110          | 12,3    | 330     | 165     | 150     | 2.48   |
| 125       | 70.394.0125.09 | 125 SDR9 ISO S-4 20 bar | 125          | 14      | 240     | 188     | 150     | 4.06   |
| 140       | 70.394.0140.09 | 140 SDR9 ISO S-4 20 bar | 140          | 15,7    | 250     | 210     | 150     | 4.75   |
| 160       | 70.394.0160.09 | 160 SDR9 ISO S-4 20 bar | 160          | 17,9    | 415     | 240     | 150     | 6.65   |
| 180       | 70.394.0180.09 | 180 SDR9 ISO S-4 20 bar | 180          | 20,1    | 280     | 270     | 150     | 8.99   |
| 200       | 70.394.0200.09 | 200 SDR9 ISO S-4 20 bar | 200          | 22,4    | 290     | 300     | 150     | 12.20  |
| 225       | 70.394.0225.09 | 225 SDR9 ISO S-4 20 bar | 225          | 25,2    | 510     | 338     | 150     | 16.00  |
| 250       | 70.394.0250.09 | 250 SDR9 ISO S-4 20 bar | 250          | 27,9    | 410     | 375     | 250     | 21.19  |
| 280       | 70.394.0280.09 | 280 SDR9 ISO S-4 20 bar | 280          | 31,3    | 420     | 420     | 250     | 26.64  |
| 315       | 70.394.0315.09 | 315 SDR9 ISO S-4 20 bar | 315          | 35,2    | 700     | 473     | 450     | 39.00  |
| 355       | 70.394.0355.09 | 355 SDR9 ISO S-4 20 bar | 355          | 39,7    | 500     | 560     | 300     | 55.30  |
| 400       | 70.394.0400.09 | 400 SDR9 ISO S-4 20 bar | 400          | 44,7    | 520     | 637     | 300     | 66.20  |
| 450       | 70.394.0450.09 | 450 SDR9 ISO S-4 20 bar | 450          | 50,3    | 550     | 711     | 300     | 83.96  |
| 500       | 70.394.0500.09 | 500 SDR9 ISO S-4 20 bar | 500          | 55,8    | 570     | 783     | 350     | 117.00 |
| 560       | 70.394.0560.09 | 560 SDR9 ISO S-4 20 bar | 560          | 62,5    | 600     | 877     | 350     | 150.00 |
| 630       | 70.394.0630.09 | 630 SDR9 ISO S-4 20 bar | 630          | 70,3    | 850     | 955     | 350     | 200.00 |