


Fittings with short Spigot

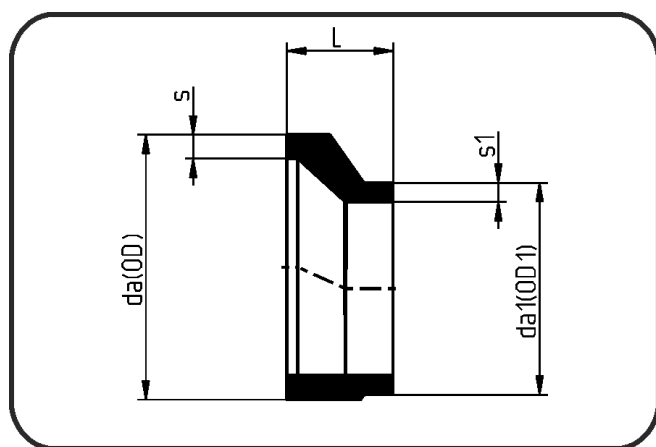

Code: 319

- Reducer excentric
- short spigot
- machined
- Butt-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
400/250	70.319.4025.17	400/250 SDR17 ISO S-8	400	250	23,7	230	14,8	7.31
400/280	70.319.4028.17	400/280 SDR17 ISO S-8	400	280	23,7	200	16,6	5.87
400/315	70.319.4031.17	400/315 SDR17 ISO S-8	400	315	23,7	185	18,7	7.00
400/355	70.319.4035.17	400/355 SDR17 ISO S-8	400	355	23,7	160	21,1	5.30
450/315	70.319.4531.17	450/315 SDR17 ISO S-8	450	315	26,7	230	18,7	9.40
450/355	70.319.4535.17	450/355 SDR17 ISO S-8	450	355	26,7	190	21,1	9.20
450/400	70.319.4540.17	450/400 SDR17 ISO S-8	450	400	26,7	180	23,7	7.60
500/315	70.319.5031.17	500/315 SDR17 ISO S-8	500	315	29,7	270	18,7	18.60
500/355	70.319.5035.17	500/355 SDR17 ISO S-8	500	355	29,7	290	21,1	11.60
500/400	70.319.5040.17	500/400 SDR17 ISO S-8	500	400	29,7	200	23,7	10.70
500/450	70.319.5045.17	500/450 SDR17 ISO S-8	500	450	29,7	150	26,7	6.80
560/400	70.319.5640.17	560/400 SDR17 ISO S-8	560	400	33,2	270	23,7	18.00
560/450	70.319.5645.17	560/450 SDR17 ISO S-8	560	450	33,2	223	26,7	14.00
630/315	70.319.6331.17	630/315 SDR17 ISO S-8	630	315	37,4	390	18,7	57.81
630/450	70.319.6345.17	630/450 SDR17 ISO S-8	630	450	37,4	290	26,7	27.80
630/500	70.319.6350.17	630/500 SDR17 ISO S-8	630	500	37,4	250	29,7	21.00
400/225	70.319.4022.11	400/225 SDR11 ISO S-5	400	225	36,3	250	20,5	11.20
400/250	70.319.4025.11	400/250 SDR11 ISO S-5	400	250	36,3	230	22,7	11.60
400/315	70.319.4031.11	400/315 SDR11 ISO S-5	400	315	36,3	190	28,6	8.60
400/355	70.319.4035.11	400/355 SDR11 ISO S-5	400	355	36,3	170	32,2	5.90
450/250	70.319.4525.11	450/250 SDR11 ISO S-5	450	250	40,9	263	22,7	10.00
450/280	70.319.4528.11	450/280 SDR11 ISO S-5	450	280	40,9	250	25,4	17.00
450/315	70.319.4531.11	450/315 SDR11 ISO S-5	450	315	40,9	235	28,6	14.70
450/355	70.319.4535.11	450/355 SDR11 ISO S-5	450	355	40,9	200	32,2	9.50
450/400	70.319.4540.11	450/400 SDR11 ISO S-5	450	400	40,9	180	36,3	10.00
500/315	70.319.5031.11	500/315 SDR11 ISO S-5	500	315	45,4	270	28,6	21.80
500/355	70.319.5035.11	500/355 SDR11 ISO S-5	500	355	45,4	250	32,2	16.90
500/400	70.319.5040.11	500/400 SDR11 ISO S-5	500	400	45,4	200	36,3	15.00

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
500/450	70.319.5045.11	500/450 SDR11 ISO S-5	500	450	45,4	190	40,9	16.20
560/400	70.319.5640.11	560/400 SDR11 ISO S-5	560	400	50,8	263	36,3	27.00
560/450	70.319.5645.11	560/450 SDR11 ISO S-5	560	450	50,8	220	40,9	17.80
560/500	70.319.5650.11	560/500 SDR11 ISO S-5	560	500	50,8	210	45,4	19.00
630/450	70.319.6345.11	630/450 SDR11 ISO S-5	630	450	57,2	300	40,9	37.00
630/500	70.319.6350.11	630/500 SDR11 ISO S-5	630	500	57,2	300	45,4	30.20
630/560	70.319.6356.11	630/560 SDR11 ISO S-5	630	560	57,2	340	50,8	25.00