


Fittings with short Spigot

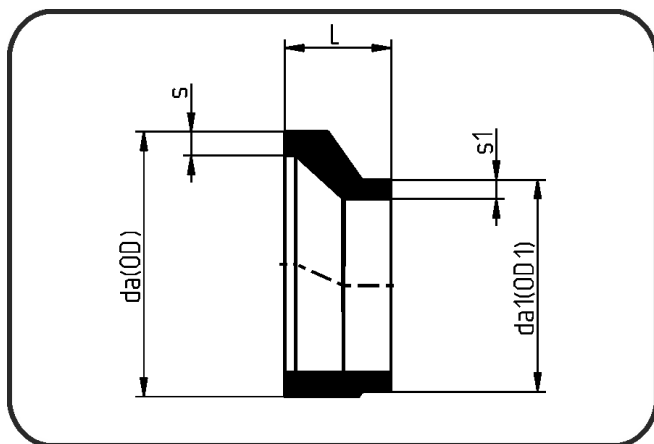

Code: 319

- Reducer eccentric
- short spigot
- machined
- Butt-welding
- PPR grey

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
280/110	11.319.2811.11	280/110 SDR11 ISO S-5	280	110	25,4	230	10	4.60
280/160	11.319.2816.11	280/160 SDR11 ISO S-5	280	160	25,4	175	14,6	4.00
280/180	11.319.2818.11	280/180 SDR11 ISO S-5	280	180	25,4	170	16,4	3.80
280/225	11.319.2822.11	280/225 SDR11 ISO S-5	280	225	25,4	140	20,5	2.96
315/110	11.319.3111.11	315/110 SDR11 ISO S-5	315	110	28,6	240	10	4.62
315/125	11.319.3112.11	315/125 SDR11 ISO S-5	315	125	28,6	240	11,4	6.80
315/140	11.319.3114.11	315/140 SDR11 ISO S-5	315	140	28,6	240	12,7	4.52
315/160	11.319.3116.11	315/160 SDR11 ISO S-5	315	160	28,6	220	14,6	6.70
315/200	11.319.3120.11	315/200 SDR11 ISO S-5	315	200	28,6	195	18,2	6.00
315/225	11.319.3122.11	315/225 SDR11 ISO S-5	315	225	28,6	175	20,5	4.78
315/250	11.319.3125.11	315/250 SDR11 ISO S-5	315	280	28,6	150	25,4	4.09
315/280	11.319.3128.11	315/280 SDR11 ISO S-5	315	250	28,6	140	22,7	3.40
355/140	11.319.3514.11	355/140 SDR11 ISO S-5	355	140	32,2	260	12,7	9.90
355/225	11.319.3522.11	355/225 SDR11 ISO S-5	355	315	32,2	210	20,5	7.70
355/250	11.319.3525.11	355/250 SDR11 ISO S-5	355	250	32,2	180	22,7	6.19
355/280	11.319.3528.11	355/280 SDR11 ISO S-5	355	280	32,2	165	25,4	5.73
355/315	11.319.3531.11	355/315 SDR11 ISO S-5	355	315	32,2	157	28,6	5.20
400/160	11.319.4016.11	400/160 SDR11 ISO S-5	400	160	36,3	270	14,6	13.60
400/225	11.319.4022.11	400/225 SDR11 ISO S-5	400	225	36,3	250	20,5	12.20
400/280	11.319.4028.11	400/280 SDR11 ISO S-5	400	280	36,3	220	25,4	9.40
400/315	11.319.4031.11	400/315 SDR11 ISO S-5	400	315	36,3	190	28,6	8.27
400/355	11.319.4035.11	400/355 SDR11 ISO S-5	400	355	36,3	170	32,2	7.20
450/225	11.319.4522.11	450/225 SDR11 ISO S-5	450	225	40,9	280	20,5	15.30
450/315	11.319.4531.11	450/315 SDR11 ISO S-5	450	315	40,9	235	28,6	13.80
450/355	11.319.4535.11	450/355 SDR11 ISO S-5	450	355	40,9	200	32,2	9.95
500/315	11.319.5031.11	500/315 SDR11 ISO S-5	500	315	45,4	270	28,6	16.90
500/355	11.319.5035.11	500/355 SDR11 ISO S-5	500	355	45,4	250	32,2	18.00
500/400	11.319.5040.11	500/400 SDR11 ISO S-5	500	400	45,4	200	36,3	14.20

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
500/450	11.319.5045.11	500/450 SDR11 ISO S-5	500	450	45,4	190	40,9	12.60