


Fittings

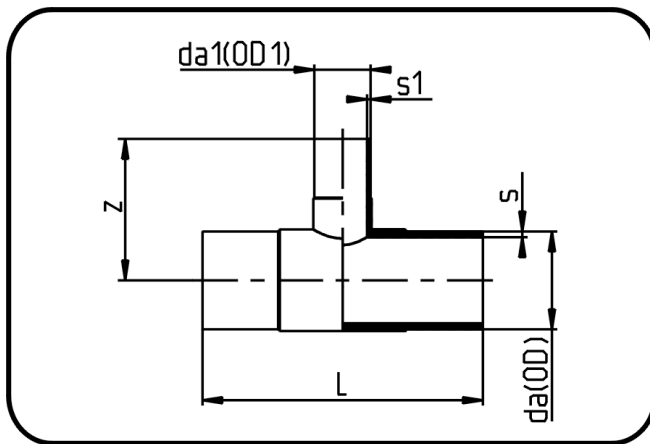

Code: 065

- Tee reduced
- long spigot
- injection moulded
- Butt + IR-welding
- PVDF UHP natural

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	z mm	L mm	s1 mm	Weight
110/90	35.065.1190.33	110/90 SDR33 ISO S-16	110	90	3,4	150	313	2,8	1.01
160/90	35.065.1690.33	160/90 SDR33 ISO S-16	160	90	4,9	183	348	2,8	2.51
160/110	35.065.1611.33	160/110 SDR33 ISO S-16	160	110	4,9	183	349	3,4	2.72
225/160	35.065.2216.33	225/160 SDR33 ISO S-16	225	160	6,9	181	352	4,9	4.28
63/20	35.065.6320.21	63/20 SDR21 ISO S-10	63	20	3	70,5	96	1,9	0.13
63/25	35.065.6325.21	63/25 SDR21 ISO S-10	63	25	3	70,5	102	1,9	0.13
63/32	35.065.6332.21	63/32 SDR21 ISO S-10	63	32	3	70,5	109	2,4	0.15
63/40	35.065.6340.21	63/40 SDR21 ISO S-10	63	40	3	70,5	117	2,4	0.16
63/50	35.065.6350.21	63/50 SDR21 ISO S-10	63	50	3	70,5	127	3	0.19
90/20	35.065.9020.21	90/20 SDR21 ISO S-10	90	20	4,3	95	230	1,9	0.64
90/25	35.065.9025.21	90/25 SDR21 ISO S-10	90	25	4,3	95	230	1,9	0.64
90/32	35.065.9032.21	90/32 SDR21 ISO S-10	90	32	4,3	95	230	2,4	0.66
90/40	35.065.9040.21	90/40 SDR21 ISO S-10	90	40	4,3	95	230	2,4	0.64
90/50	35.065.9050.21	90/50 SDR21 ISO S-10	90	50	4,3	95	230	3	0.67
90/63	35.065.9063.21	90/63 SDR21 ISO S-10	90	63	4,3	95	230	3	0.69
110/20	35.065.1120.21	110/20 SDR21 ISO S-10	110	20	5,3	105	230	1,9	0.97
110/25	35.065.1125.21	110/25 SDR21 ISO S-10	110	25	5,3	105	230	1,9	0.98
110/32	35.065.1132.21	110/32 SDR21 ISO S-10	110	32	5,3	105	230	2,4	1.00
110/40	35.065.1140.21	110/40 SDR21 ISO S-10	110	40	5,3	105	230	2,4	0.98
110/50	35.065.1150.21	110/50 SDR21 ISO S-10	110	50	5,3	105	230	3	0.99
110/63	35.065.1163.21	110/63 SDR21 ISO S-10	110	63	5,3	105	230	3	0.99
110/90	35.065.1190.21	110/90 SDR21 ISO S-10	110	90	5,3	150	313	4,3	1.37
160/63	35.065.1663.21	160/63 SDR21 ISO S-10	160	63	7,7	175	345	3	2.80
160/90	35.065.1690.21	160/90 SDR21 ISO S-10	160	90	7,7	183	348	4,3	3.28
160/110	35.065.1611.21	160/110 SDR21 ISO S-10	160	110	7,7	183	349	5,3	3.46
225/110	35.065.2211.21	225/110 SDR21 ISO S-10	225	110	10,8	170	353	5,3	5.77
90/20	35.065.9020.31	90/20 SDR33/21 MOP 10 bar	90	20	2,8	95	230	1,9	0.63
90/25	35.065.9025.31	90/25 SDR33/21 MOP 10 bar	90	25	2,8	95	230	1,9	0.63

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	z mm	L mm	s1 mm	Weight
90/32	35.065.9032.31	90/32 SDR33/21 MOP 10 bar	90	32	2,8	95	230	2,4	0.64
90/63	35.065.9063.31	90/63 SDR33/21 MOP 10 bar	90	63	2,8	130	265	3	0.59
110/63	35.065.1163.31	110/63 SDR33/21 MOP 10 bar	110	63	3,4	150	315	3	0.97
160/63	35.065.1663.31	160/63 SDR33/21 MOP 10 bar	160	63	4,9	175	348	3	2.10
160/90	35.065.1690.31	160/90 SDR33/21 MOP 10 bar	160	90	4,9	183	348	4,3	2.52
160/110	35.065.1611.31	160/110 SDR33/21 MOP 10 bar	160	110	4,9	185	347	5,3	2.82
225/90	35.065.2290.31	225/90 SDR33/21 MOP 10 bar	225	90	6,9	175	353	4,3	4.39
225/110	35.065.2211.31	225/110 SDR33/21 MOP 10 bar	225	110	6,9	170	350	5,3	4.27