


## Segmented Fittings

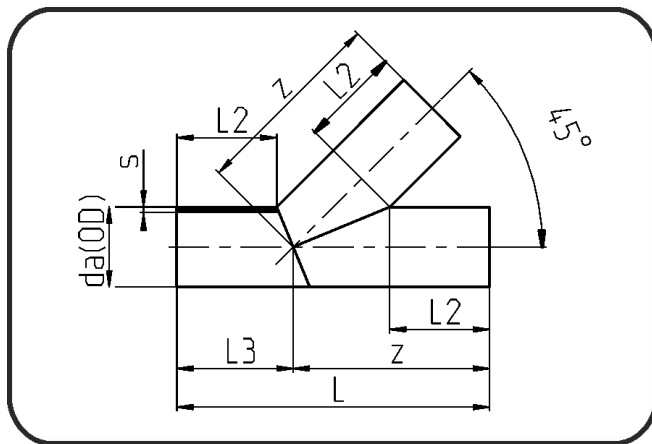

Code: 325

- Tee 45°
- segmented
- derating factor 0.6
- Butt + E-fusion-welding
- PE 100-RC black

| Dimension | Code           | Detail                 | da(OD)<br>mm | s<br>mm | z<br>mm | L<br>mm | L2<br>mm | L3<br>mm | Weight |
|-----------|----------------|------------------------|--------------|---------|---------|---------|----------|----------|--------|
| 250       | 70.325.0250.17 | 250x14,8 SDR17 ISO S-8 | 250          | 14,8    | 602     | 954     | 300      | 352      | 15.30  |
| 280       | 70.325.0280.17 | 280x16,6 SDR17 ISO S-8 | 280          | 16,6    | 638     | 996     | 300      | 358      | 20.10  |
| 315       | 70.325.0315.17 | 315x18,7 SDR17 ISO S-8 | 315          | 18,7    | 730     | 1.145   | 350      | 415      | 33.00  |
| 355       | 70.325.0355.17 | 355x21,1 SDR17 ISO S-8 | 355          | 21,1    | 779     | 1.203   | 350      | 424      | 44.40  |
| 400       | 70.325.0400.17 | 400x23,7 SDR17 ISO S-8 | 400          | 23,7    | 833     | 1.266   | 350      | 433      | 59.40  |
| 450       | 70.325.0450.17 | 450x26,7 SDR17 ISO S-8 | 450          | 26,7    | 893     | 1.336   | 350      | 443      | 79.80  |
| 500       | 70.325.0500.17 | 500x29,7 SDR17 ISO S-8 | 500          | 29,7    | 954     | 1.408   | 350      | 454      | 104.00 |
| 560       | 70.325.0560.17 | 560x33,2 SDR17 ISO S-8 | 560          | 33,2    | 1.026   | 1.492   | 350      | 466      | 139.00 |
| 630       | 70.325.0630.17 | 630x37,4 SDR17 ISO S-8 | 630          | 37,4    | 1.110   | 1.590   | 350      | 480      | 190.00 |
| 250       | 70.325.0250.11 | 250x22,7 SDR11 ISO S-5 | 250          | 22,7    | 602     | 954     | 300      | 352      | 22.50  |
| 280       | 70.325.0280.11 | 280x25,4 SDR11 ISO S-5 | 280          | 25,4    | 638     | 996     | 300      | 358      | 33.50  |
| 315       | 70.325.0315.11 | 315x28,6 SDR11 ISO S-5 | 315          | 28,6    | 730     | 1.145   | 350      | 415      | 42.90  |
| 355       | 70.325.0355.11 | 355x32,2 SDR11 ISO S-5 | 355          | 32,2    | 779     | 1.203   | 350      | 424      | 65.20  |
| 400       | 70.325.0400.11 | 400x36,3 SDR11 ISO S-5 | 400          | 36,3    | 833     | 1.266   | 350      | 433      | 87.50  |
| 450       | 70.325.0450.11 | 450x40,9 SDR11 ISO S-5 | 450          | 40,9    | 893     | 1.336   | 350      | 443      | 117.70 |
| 500       | 70.325.0500.11 | 500x45,4 SDR11 ISO S-5 | 500          | 45,4    | 954     | 1.408   | 350      | 454      | 154.00 |
| 560       | 70.325.0560.11 | 560x50,8 SDR11 ISO S-5 | 560          | 50,8    | 1.026   | 1.492   | 350      | 466      | 206.00 |
| 630       | 70.325.0630.11 | 630x57,2 SDR11 ISO S-5 | 630          | 57,2    | 1.110   | 1.590   | 350      | 480      | 278.00 |